


## **Defender Cavity Fit Restrictor**


Standard duty restrictor




- Tested to BS 6375-2 to load bearing capacity of safety devices
- Austenitic 304 stainless steel for enhanced corrosion resistance - BS EN 10088-2:2005 Grade 1.4301
- Compatible with all Yale standard duty hinges including Defender Egress Easy Clean

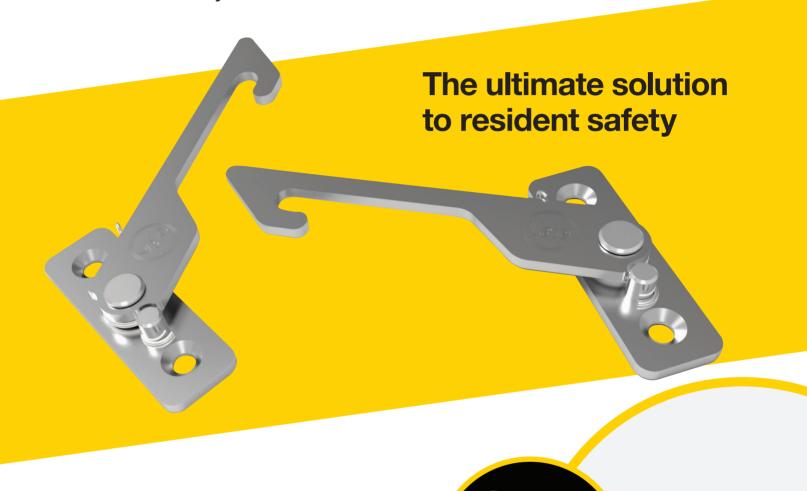

## **Product Specifications**

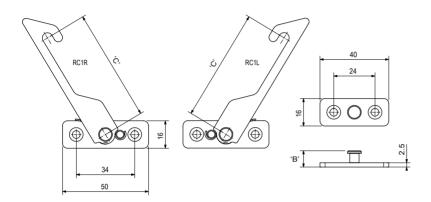



Part Codes	Description	Cavity Size (Dim 'A')	Pin Height (Dim 'B')	Restrictor Length (Dim 'C')	Box Quantity
RC1L-Y	Cavity Restrictor LH 66mm	-	-	65.5mm	25
RC1R-Y	Cavity Restrictor RH 66mm	-	-	65.5mm	25
RC2L-Y	Cavity Restrictor LH 116mm	-	-	115.5mm	25
RC2R-Y	Cavity Restrictor RH 116mm	-	-	115.5mm	25
RC3L-Y	Cavity Restrictor LH 166mm	-	-	165.5mm	25
RC3R-Y	Cavity Restrictor RH 166mm	-	-	165.5mm	25
6C1	Locator Pin 13mm	13-14mm	9.5mm	-	25
SC2	Locator Pin 16mm	16-17mm	13.5mm	-	25
6C3	Locator Pin 17mm	17-18mm	14.5mm	-	25
6C4	Locator Pin 13mm	13-14mm	11.5mm	-	25

- Easy to fit with no routing required
- Compatible with standard countersunk fixings
- Can be used on windows without reinforcement
- Available in 13mm, 16mm and 17mm cavity heights
- Left and right hand product available

## Yale Door and Window Solutions

Kingsmead Industrial Estate, Princess Elizabeth Way, Cheltenham, Gloucestershire, GL51 7RE UK T: 01242 221 200 F: 01242 520 828

## www.yaledws.co.uk

**THE YALE BRAND,** with its unparalleled global reach and range of products, reassures more people in more countries than any other consumer locking solution.

**THE ASSA ABLOY GROUP** is the world's leading manufacturer and supplier of locking solutions, dedicated to satisfying end-user needs for security, safety and convenience.

© Yale, September 2016





Due to a continuous programme of development the company reserves the right to make alterations without notice.

(Products which are not a stocked item will be subject to a longer lead time which needs to be agreed with your Yale representative).